


OVERVIEW

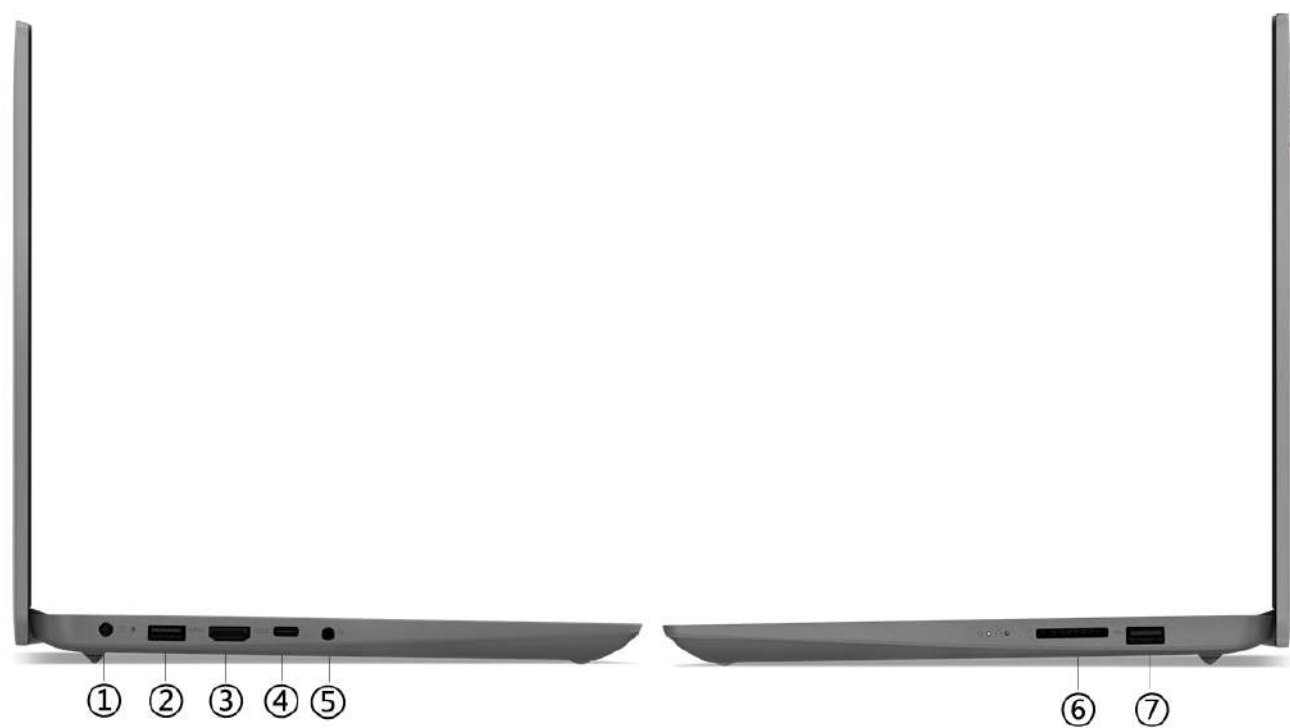

1. Power connector	5. Headphone / microphone combo jack (3.5mm)
2. USB 3.2 Gen 1	6. Card reader
3. HDMI 1.4b	7. USB 2.0
4. USB-C 3.2 Gen 1	

PERFORMANCE

Processor

Processor Family

Intel® Pentium® or 12th Generation Intel Core™ i3 / i5 / i7 Processor

Processor**[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i3-1215U	6 (2 P-core + 4 E-core)	8	P-core 1.2GHz / E-core 0.9GHz	P-core 4.4GHz / E-core 3.3GHz	10MB	DDR4-3200	Intel UHD Graphics
Core i5-1235U	10 (2 P-core + 8 E-core)	12	P-core 1.3GHz / E-core 0.9GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	DDR4-3200	Intel Iris® Xe Graphics
Core i7-1255U	10 (2 P-core + 8 E-core)	12	P-core 1.7GHz / E-core 1.2GHz	P-core 4.7GHz / E-core 3.5GHz	12MB	DDR4-3200	Intel Iris Xe Graphics

Notes:

1. Intel Iris Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel Iris Xe Graphics will function as Intel UHD Graphics.

Operating System

Operating System**[1]

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home in S mode
- Windows 11 Home Single Language
- Windows 11 Home Single Language in S mode
- No operating system

Notes:

1. Some features may not be supported on the system with Linux preload, including but not limited to Intel RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics**[1]

Graphics	Type	Memory	Key Features
Intel UHD Graphics	Integrated	Shared	DirectX® 12.1
Intel Iris Xe Graphics	Integrated	Shared	DirectX 12.1

Notes:

1. Intel Iris Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel Iris Xe Graphics will function as Intel UHD Graphics.

Monitor Support

Monitor Support

Supports up to 3 independent displays (native display and 2 external monitors via HDMI® and USB-C®)

- HDMI supports up to 4K@30Hz
- USB-C supports up to 4K@60Hz

Chipset

Chipset

Intel SoC (System on Chip) platform

Memory

Max Memory[1]

- Up to 12GB (4GB soldered + 8GB SO-DIMM) DDR4-3200 offering
- Up to 16GB (8GB soldered + 8GB SO-DIMM) DDR4-3200 offering

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

Memory Type

DDR4-3200

Notes:

- 1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

- Models with 38Wh battery: up to two drives, 1x 2.5" HDD + 1x M.2 SSD
 - 2.5" HDD up to 1TB
 - M.2 2242 SSD up to 1TB
 - M.2 2280 SSD up to 1TB
- Models with 45Wh battery: one drive, 1x M.2 SSD
 - M.2 2242 SSD up to 1TB
 - M.2 2280 SSD up to 1TB

Storage Slot

- Models with 38Wh battery: one 2.5" drive slot + one M.2 slot
 - One 2.5" SATA HDD slot
 - One M.2 2280 PCIe® 4.0 x4 slot
- Models with 45Wh battery: one M.2 slot
 - One M.2 2280 PCIe 4.0 x4 slot

Storage Type^{***}

Disk Type	Interface	RPM	Offering
2.5" SATA HDD	SATA 6Gb/s	5.4K	1TB
M.2 2242 SSD	PCIe NVMe®, PCIe 3.0 x4	-	128GB / 256GB
M.2 2242 SSD	PCIe NVMe, PCIe 4.0 x4	-	256GB / 512GB / 1TB
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	512GB / 1TB

Notes:

- 1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

Removable Storage

Optical

None

Card Reader

4-in-1 card reader (SD, SDHC, SDXC, MMC)

Multi-Media

Audio Chip

High Definition (HD) Audio

Speakers

Stereo speakers, 1.5W x2, Dolby® Audio™

Microphone

Dual-microphone array with noise-cancelling

Camera

HD 720p, with privacy shutter, fixed focus

Battery

Battery^{**}

- Integrated Li-Polymer 38Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

- Integrated Li-Polymer 45Wh battery, supports Rapid Charge Boost (get 2 hours of runtime with a 15-minute charge)
- Max Battery Life**^[1]
- Models with 38Wh battery:
MobileMark® 2018: 4.8 hr
Local video (1080p) playback@150nits: 7.1 hr
 - Models with 45Wh battery:
MobileMark 2018: 5.7 hr
Local video (1080p) playback@150nits: 10 hr

Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter

65W round tip (3-pin) AC adapter, 100-240V, 50-60Hz

DESIGN

Display

Display^{**[1]}

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle
15.6"	FHD (1920x1080)	None	TN	250 nits	Anti-glare	16:9	500:1	45% NTSC	90°
15.6"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	800:1	45% NTSC	170°
15.6"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	800:1	45% NTSC	170°

- Touchscreen**
- On-cell capacitive-type multi-touch, supports 10-point touch
 - Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device

Keyboard

6-row, multimedia Fn keys, numeric keypad

Keyboard Backlight

- LED backlight
- Non-backlight

Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP), 69 x 104 mm (2.72 x 4.09 inches)

Mechanical

Dimensions (WxDxH)^[1]

359.2 x 236.5 x 19.9 mm (14.14 x 9.31 x 0.78 inches)

Weight^[2]

Starting at 1.63 kg (3.59 lbs)

Case Color^{**}

- Abyss blue
- Arctic grey
- Misty blue

Surface Treatment

IMR (in-mold decoration by roller)

Case Material

PC-ABS (top), PC-ABS (bottom)

Notes:

1. The system dimensions vary depending on configurations.
2. The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet

No onboard Ethernet

WLAN + Bluetooth®^[1]**

- 802.11ac 2x2 Wi-Fi® + Bluetooth 5.0, M.2 card
- Wi-Fi 6, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 card

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation

Ports^[1]

Standard Ports

- 1x USB 2.0
- 1x USB 3.2 Gen 1
- 1x USB-C 3.2 Gen 1 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.2)
- 1x HDMI 1.4b
- 1x Card reader
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Power connector

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt™ 3/4: 40 Gbit/s

SECURITY & PRIVACY

Security

Security Chip

Firmware TPM 2.0 integrated in SoC

Fingerprint Reader

- Touch style fingerprint reader integrated in power button
- No fingerprint reader

BIOS Security

- Administrator password
- Power-on password
- Hard disk password
- Self-healing BIOS

Other Security

Camera privacy shutter

SERVICE**Warranty****Base Warranty****

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 2-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) courier or carry-in service

ENVIRONMENTAL**Operating Environment****Temperature^[1]**

- At altitudes up to 2438 m (8,000 ft)
 - Operating: 5°C to 35°C (41°F to 95°F)
 - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
 - Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

ACCESSORIES**Bundled Accessories****Bundled Accessories**

None

CERTIFICATIONS**Green Certifications****Green Certifications**

- ENERGY STAR® 8.0
- ErP Lot 3
- RoHS compliant

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES

OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel



intel



intel



intel



intel