


OVERVIEW

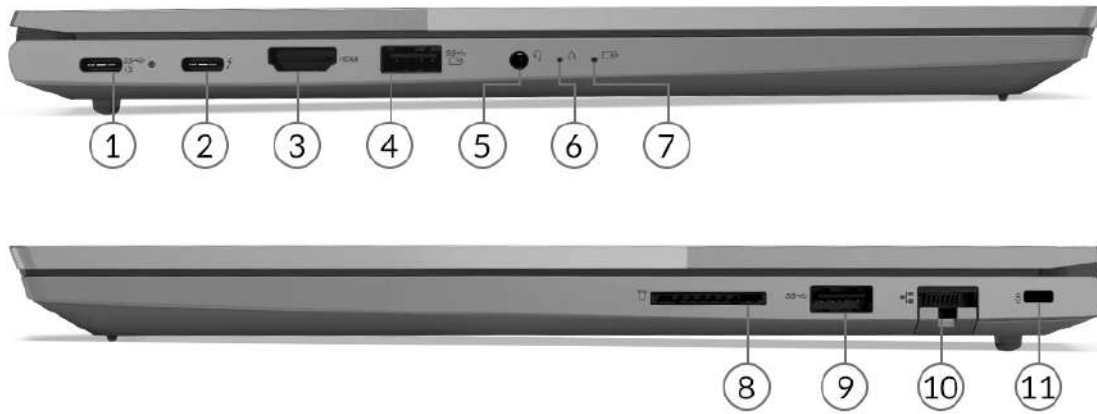

1. USB-C 3.2 Gen 2	7. Battery light
2. Thunderbolt 4	8. SD card reader
3. HDMI	9. USB 3.2 Gen 1
4. USB 3.2 Gen 1 (Always On)	10. Ethernet (RJ-45)
5. Headphone / microphone combo jack (3.5mm)	11. Kensington Nano Security Slot
6. NOVO button hole	

PERFORMANCE

Processor

Processor Family

12th Generation Intel® Core™ i3 / i5 / i7 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core i3-1215U	6 (2 P-core + 4 E-core)	8	P-core 1.2GHz / E-core 0.9GHz	P-core 4.4GHz / E-core 3.3GHz	10MB	Intel UHD Graphics
Core i3-1220P	10 (2 P-core + 8 E-core)	12	P-core 1.5GHz / E-core 1.1GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	Intel UHD Graphics
Core i5-1235U	10 (2 P-core + 8 E-core)	12	P-core 1.3GHz / E-core 0.9GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	Intel Iris® Xe Graphics ^[1]
Core i5-1240P	12 (4 P-core + 8 E-core)	16	P-core 1.7GHz / E-core 1.2GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	Intel Iris Xe Graphics ^[2]
Core i7-1255U	10 (2 P-core + 8 E-core)	12	P-core 1.7GHz / E-core 1.2GHz	P-core 4.7GHz / E-core 3.5GHz	12MB	Intel Iris Xe Graphics ^[3]
Core i7-1260P	12 (4 P-core + 8 E-core)	16	P-core 2.1GHz / E-core 1.5GHz	P-core 4.7GHz / E-core 3.4GHz	18MB	Intel Iris Xe Graphics ^[4]

Notes:

[1], [2], [3], [4] Intel Iris Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel Iris Xe Graphics will function as Intel UHD Graphics.

Operating System

Operating System**

- Ubuntu Linux^[1]
- Windows® 11 DG Windows 10 Pro 64
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 Pro
- No operating system

Notes:

[1] Ubuntu Linux is for special bid only.

Graphics

Graphics**

Graphics	Type	Memory	TGP	Key Features
Intel UHD Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12.1
Intel Iris Xe Graphics ^[1]	Integrated	Shared	Share CPU TDP	DirectX 12.1
NVIDIA® GeForce MX550	Discrete	2GB GDDR6	-	DirectX 12

Notes:

[1] Intel Iris Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel Iris Xe Graphics will function as Intel UHD Graphics.

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI®, USB-C® and Thunderbolt™)

- HDMI supports up to 3840x2160@60Hz
- USB-C supports up to 5120x3200@60Hz
- Thunderbolt supports up to 5120x3200@60Hz

Chipset

Chipset

Intel SoC (System on Chip) platform

Memory

Max Memory^[1]

Up to 40GB (8GB soldered + 32GB SO-DIMM) DDR4-3200

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

Memory Type

DDR4-3200

Notes:

[1] Maximum memory is only to test technical readiness of notebook. Available memory to sell would vary.

Storage

Storage Support^{[1][2]}

Up to two drives, 2x M.2 SSD

- M.2 2242 SSD up to 1TB
- M.2 2280 SSD up to 1TB

Storage Slot

Two M.2 2280 PCIe® 4.0 x4 slots

Storage Type**

Disk Type	Interface	Offering
M.2 2242 SSD	PCIe NVMe®, PCIe 3.0 x4	128GB / 256GB / 512GB / 1TB
M.2 2242 SSD	PCIe NVMe, PCIe 4.0 x4	256GB / 512GB / 1TB
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4	512GB / 1TB

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

[2] The system supports dual SSD via two M.2 slots, but Lenovo only offers one SSD configuration, another SSD slot for user self-extension.

Removable Storage

Optical

None

Card Reader

4-in-1 card reader (SD, SDHC, SDXC, MMC)

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™

Microphone

Dual-microphone array with AI-based noise-cancelling, switchable audio modes

Camera**

- FHD 1080p, with privacy shutter, fixed focus
- HD 720p, with privacy shutter, fixed focus

Battery

Battery**

- Integrated Li-Polymer 45Wh battery, supports Rapid Charge Pro (charge up to 50% in 30min)
- Integrated Li-Polymer 60Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

Max Battery Life^[1]

- Models with 45Wh battery:
MobileMark® 2018: 6 hr
Local video (1080p) playback@150nits: 8 hr
- Models with 60Wh battery:
MobileMark 2018: 8 hr
Local video (1080p) playback@150nits: 11 hr

Notes:

[1] All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, MobileMark 25, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter**Power Adapter**^[1]**

- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin, wall-mount) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

Notes:

[1] AC adapter offerings depend on the country.

DESIGN**Display****Display****

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
15.6"	FHD (1920x1080)	None	TN	250nits	Anti-glare	16:9	500:1	45% NTSC	45°/45°/15°/35°	-
15.6"	FHD (1920x1080)	None	IPS ^[1]	300nits	Anti-glare	16:9	800:1	45% NTSC	85°/85°/85°/85°	TÜV Low Blue Light
15.6"	FHD (1920x1080)	Multi-touch	IPS ^[2]	300nits	Anti-glare	16:9	800:1	45% NTSC	85°/85°/85°/85°	TÜV Low Blue Light
15.6"	FHD (1920x1080)	None	IPS ^[3]	300nits	Anti-glare	16:9	1200:1	100% sRGB	85°/85°/85°/85°	TÜV Low Blue Light

Touchscreen

- On-cell multi-touch, supports 10-point touch
- Non-touch

Notes:

[1], [2], [3] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device**Keyboard**

6-row, spill-resistant, multimedia Fn keys, SMB Service Hot key, numeric keypad

Keyboard Backlight

- LED backlight
- Non-backlight

Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP), 70 x 105 mm (2.76 x 4.13 inches)

Mechanical

Dimensions (WxDxH)^[1]

357 x 235 x 18.9 mm (14.1 x 9.25 x 0.74 inches)

Weight^[2]

Starting at 1.7 kg (3.75 lbs)

Case Color

Mineral grey, dual-tone design

Surface Treatment

Anodizing sandblasting

Case Material

Aluminium (top), PC-ABS (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet^{[1]}**

- Gigabit Ethernet, Intel Ethernet Connection I219-LM (vPro[®] models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Intel Ethernet Connection I219-V (non-vPro models), 1x RJ-45, supports Wake-on-LAN

WLAN + Bluetooth^{®[2]}**

- 802.11ac 2x2 Wi-Fi[®] + Bluetooth 5.1, M.2 card
- Wi-Fi 6, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 card^[3]
- Wi-Fi 6E, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 card^[4]

Notes:

[1] Wake-on-LAN needs the power adapter plugged in.

[2] Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.

[3] Wi-Fi 6 full features might be limited by country-level restrictions.

[4] Wi-Fi 6E full features might be limited by country-level restrictions.

Wi-Fi 6E is only enabled on Windows 11 and operates as Wi-Fi 6 with Windows 10.

6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.

Ports^[1]

Standard Ports

- 1x Card reader
- 1x Ethernet (RJ-45)
- 1x HDMI 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Thunderbolt 4 / USB4[®] 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 1x USB-C 3.2 Gen 2 (support data transfer, Power Delivery 3.0 and DisplayPort 1.4)

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt 3/4: 40 Gbit/s.

Docking

Docking

Various docking solutions supported via Thunderbolt or USB-C.

For more compatible docking solutions, please visit [Docking for ThinkBook 15 G4 IAP](#)

SECURITY & PRIVACY

Security

Security Chip

Firmware TPM 2.0 integrated in SoC

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Fingerprint Reader

Touch style fingerprint reader integrated in smart power button

BIOS Security

- Administrator password
- Power-on password
- Hard disk password
- Self-healing BIOS

Other Security

Camera privacy shutter

MANAGEABILITY

System Management

System Management

- Intel vPro Essentials^[1]
- Non-vPro

Notes:

[1] Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty^[1]

Base Warranty**

- 1-year courier or carry-in service
- 2-year (1-yr battery) courier or carry-in service

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- At altitudes up to 2438 m (8,000 ft)
 - Operating: 5°C to 35°C (41°F to 95°F)
 - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)

- Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

ACCESSORIES

Bundled Accessories

Bundled Accessories

- Lenovo 15.6" laptop casual toplayer, polyester
- None

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Gold Registered^[2]
- (Optional) TCO Certified
- ErP Lot 3
- RoHS compliant

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

[2] EPEAT is registered where applicable, please see <https://www.epeat.net> for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

Other Certifications^[1]

(Optional) TÜV Rheinland® Low Blue Light (Software Solution)

Notes:

[1] TÜV Rheinland Low Blue Light is Not applicable for TN display.

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.





intel



intel



intel



intel



intel

